



AFRICA AIRCONDITIONING & INSULATION SYSTEMS

YOUR ONE STOP HVAC SUPPLIER

TECHNICAL CATALOGUE

Acoustic Flex

Flexible ducting



ACOUSTIC FLEX



Acoustic flex is manufactured using a perforated metalised polyester inner core, wrapped in a 20mm polyester insulation blanket with the outer skin / vapour barrier in a durable AL-PET spirally wound sleeve. They are manufactured to standard lengths of 10m.



TECHNICAL DATA

Inner Duct Construction:	3 Metalized Polyester (Perforated)
Nominal Thickness of Inner Duct:	44 micron
Jacket Construction:	Met. Polyester jacket
Insulation:	20mm Polyester Insulation (200g/m ²)
Available Diameters:	152-508mm
Temperature Range:	-30°C / + 120°C
Air Velocity:	30m/sec (max)
Operating Pressure:	3000Pa (max)
Standard Length:	10 meter
Packing:	Plastic Bag

PRESSURE DROPS

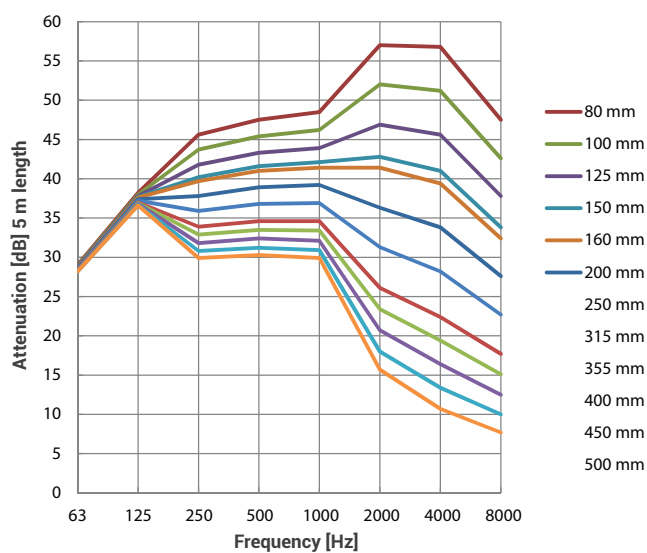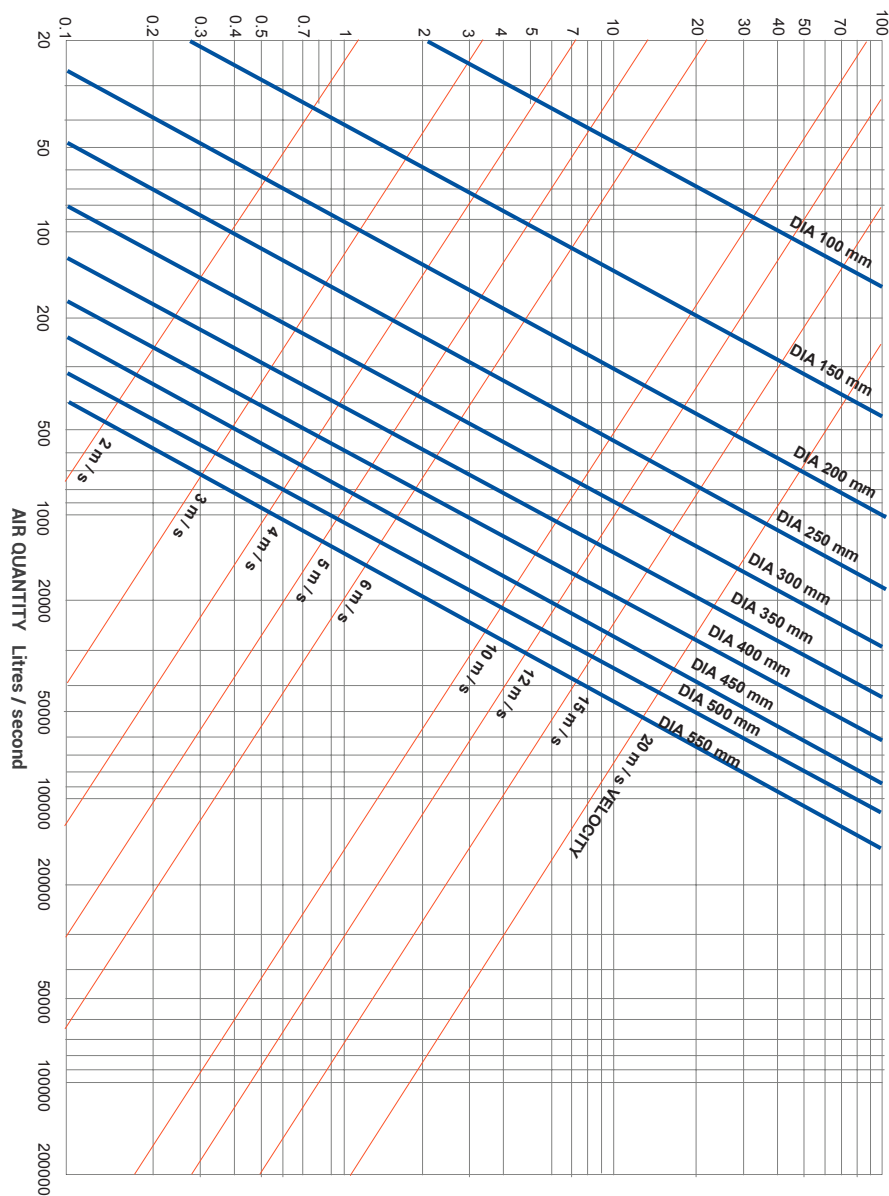

STOCKIST OF :

- » Grilles & Diffusers
- » Sheet Metal Products
- » Insulation Products
- » Dampers
- » Flexible Ducting
- » Condensate Pumps
- » Fans
- » Adhesives & Sealants
- » Duct Board
- » Aircon Accessories
- » Fibreglass Insulation
- » Closed Cell Insulation
- » Copper Insulation



AFRICA AIRCONDITIONING & INSULATION SYSTEMS (PTY) LTD

Unit 1A Buro Centre, 11 Garth Road,
Mayville, Durban, South Africa

t: +27 87 135 7120

e: sales@africaaircon.co.za

w: www.africaaircon.co.za